


AC-A1-120 Panels Specifications

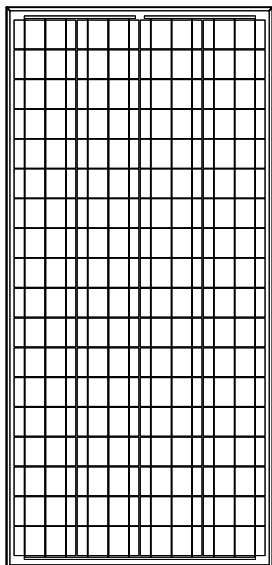

Laminate: Glass /EVA / TPT (tedlar/pet/tedlar) or TPE

Front Side: High-transmission 3.2mm tempered glass

Back Side: TPT /TPE

Frame: Clear anodized aluminum frame

Output cable: Multicontact connectors

Module Type	Pm(Wp)±5%	Vmpp(V)	Impp(A)	Voc(V)	Isc(A)	Module size	NET(kg)
AC-A1-120	120	17.3	6.94	21.6	7.79	1380*670*35mm 54.3"*26.4"*1.38"	11.0

Operation Temperature Range: - 40°C ~85°C


NOCT: 48°C ±3°C

Temperature coefficients of Im: + 0.1 %/°C

Temperature coefficients of Vm: - 0.38 %/°C

Maximum System Voltage: DC715V

STC: 1000W/m², 25°C, AM1.5

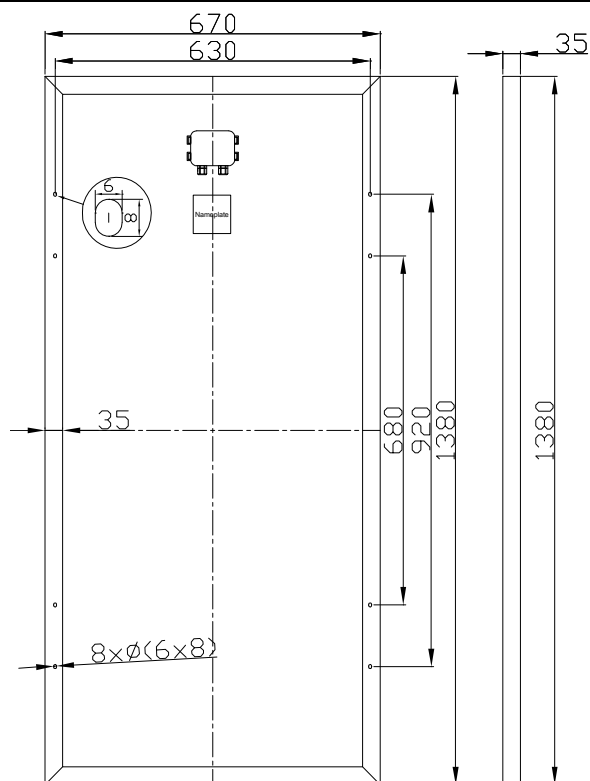

All the data of this sheet are subjected to change without notice.